

VoIP Door Phone

Voice / Video / keypad via SIP



Voice, video, keypad access control via SIP

Web server for remote control and configuration

SIP connection P2P or IP PBX network system

Modularity

The Door Phone Multi companies, Pure IP, modular, and evolutionary *...

The VoIP Door phone is complete door entry solution based on IP communication.

The connection via SIP P2P protocol to different IP systems or LAN makes it very attractive For all company sizes.

The support of video as same as audio via SIP gives many opportunities of practise usage In private sector as same as security.

Programming as same as maintenance and firmware upgrade is done through included webserver. The unit is reachable from any place of the world easily.

Benefits

- Modular system allows to connect 1 to 64 buttons
- Two 16digit numbers (IP adress) with each button
- Possible to connect two independent locks for door opening
- Two codes for hanging up the guard from telephone
- Two codes for door opening from telephone
- Six code locks (password from buttons at the door)
- Possibility to connect a numerical keyboard this way that the guard can include 4 – 18 standard buttons
- Integrated heating of printed circuit
- Permanent lighting through visiting cards
- Included colour camera
- Ethernet – 10/100Mb with standard 10BaseT a 100BaseTx
- Web server for remote configuration – BOA
- Operating system – Linux 2.6
- SIP connection P2P or PBX network system
- WEB – firmware upgradeable
- WEB – interface for control and setup parameters



Models

- IPDP-00 – basic module without button
- IPDP-00C – basic module with integrated camera
- IPNC1, C2, C4 – additional button module with 1, 2 or 4 buttons
- IPDP-K – additional module with numeral keypad

Features

Settings

- website interface – remote management

Power supply

- 12 volts ~/(= (door unit, light, relays and camera)

Environment


- Storage Temperature range: -20°C/+70°C
- Operating Temperature range: -20°C/+70°C
- Humidity: 10% to 80% at 30°C

Camera

- switchable resolution: 320 × 240 points
640 × 480 points
- colour, contrast, brightness adjustable
- H263, H264 protocol supported

Accessories

- Cases for surface mounted
- Cases for embedded mounted
- Module with labels for companies' names
- DECT Module for wireless connection

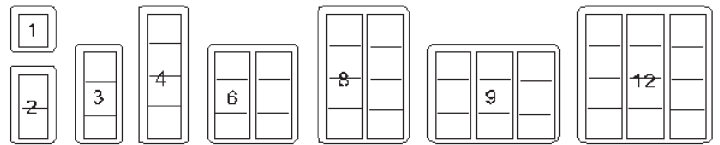

Complete module



Base embedded



Surface mounted

Surface mounted or embedded

Connectivity Options

